

REFRIGERATOR MANUFACTURER
Turbo air
 more durable, efficient, beautiful

4184 E. Conant St.
 Long Beach, CA 90808
 Tel. 310-900-1000
 Fax. 310-900-1077
www.turboairinc.com

Project :

Model # :

Item # :

Qty :

Available W/H :

Approval :

Diamond Show Case

Display Cases
 Refrigerated Show Cases

Model : CRT-77-1R-N



FEATURES & BENEFITS

■ LED lighting interior display system

Safety shielded 4 LED lighting system on every corner of the cabinet ensures a longer life and brighter lighting than fluorescent light bulbs, providing attractive, enhanced and shadow-free illumination.

■ Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air Diamond Show Case uniquely provides stainless steel shelving.

■ Beautiful 4 sided glass cabinet allows visibility from all sides to optimize display effect

■ Compact size and countertop design occupies minimum space but maximize impulse sales

■ Great space efficiency is ideal for narrow space restaurants and convenience stores

■ Elegant contemporary Euro design will enhance the interior and space decoration of any store

NATURAL
 Refrigerant

ETL
 Intertek

ETL
 Intertek

1 YEAR
 WARRANTY

5 YEAR
 WARRANTY
 (U.S. Army)

Model	Swing Door	CU./FT.	# of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D x H (inches)
CRT-77-1R-N	1	3.0	3	1/6	1.6	89	163/4 x 16 x 381/2

Diamond Show Case

Display Cases
Refrigerated Show Cases

Model : CRT-77-1R-N

ELECTRICAL DATA	
Voltage	115/60/1
Plug Type	 NEMA 5-15P
Full Load Amperes	1.6
Compressor HP	1/6
Refrigerant	R-290
Cord Length (ft.)	6.5
DIMENSIONAL DATA	
Net Capacity (cu. ft.)	3
Ext. Length Overall (in.)	16 3/4 (425mm)
Ext. Depth Overall (in.)	16 (406mm)
Ext. Height Overall (in.)	38 1/2 (978mm)
Int. Length Overall (in.)	14 3/8 (366mm)
Int. Depth Overall (in.)	12 3/4 (324mm)
Int. Height Overall (in.)	25 (635mm)
Net Weight (lbs.)	81.5
Gross Weight (lbs.)	89
# of Shelves	3
Shelf Size (in.)	14 3/8 x 12 3/4

Design and specifications subject to change without notice.
Actual shipping weight may differ due to extra packing materials for product protection.


■ **WARRANTY :** 1 Year Parts and Labor Warranty
Additional 4 Year Warranty on Compressor

■ STANDARD FEATURES


- Anti-corrosion coated evaporator
- Self-contained system
- Door lock standard
- Recommended operating conditions:
CRT models are designed to operate in environments where temperature & humidity do not exceed 75°F and 55% relative humidity.

PLAN VIEW


(unit : inch)

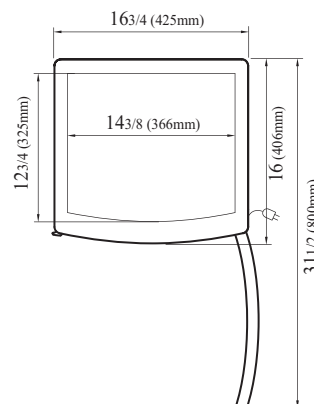

PLAN VIEW

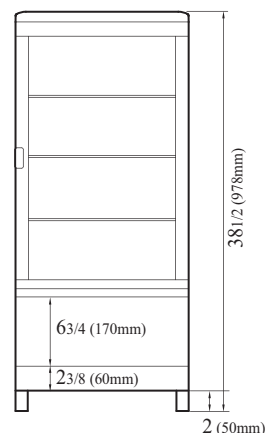

FRONT VIEW

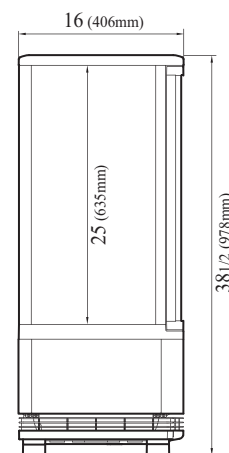

SIDE VIEW

Ver.20181213

NATURAL
Refrigerant



■ Turbo Air : 800-627-0032 ■ GK : 800-500-3519
■ Warranty : 800-381-7770 ■ AC : 888-900-1002

REFRIGERATOR MANUFACTURER
Turbo air

GERMAN
KNIFE

RADIANCE

REFRIGERATION SYSTEM
Turbo air

Texaking